



## Spiral binding

### NFP-Series, PE (natural and black)

- Operating temperature -40°C to +90°C
- Organising and protecting wires, cables and tubes
- Retro-fitting
- Wires can branch out at any point, in any direction
- Thin wall available on request
- Wide range of colours and materials available on request
- Materials include flame retardant (RPF), chemical resistant and high temperature

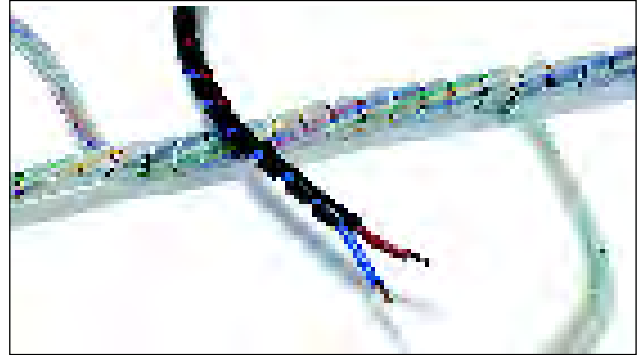

Spiral binding.

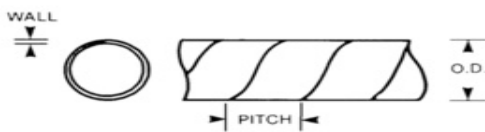

### Ordering Information

Type	∅	Wall (WT)	Bundle ∅ max.	Material (p4)	Colour	Length (m)	Article-No.
1NFP	1.6	0.8	8	PE	Black (BK) ■	30	161-01001
1NFP	1.6	0.8	8	PE	Natural (NT) ■	30	161-01000
2NFP	4.1	1	20	PE	Black (BK) ■	30	161-01003
2NFP	4.1	1	20	PE	Natural (NT) ■	30	161-01002
3NFP	9.6	1.2	100	PE	Black (BK) ■	30	161-01005
3NFP	9.6	1.2	100	PE	Natural (NT) ■	30	161-01004
4NFP	20	1.2	158	PE	Black (BK) ■	30	911-01828
4NFP	20	1.2	158	PE	Natural (NT) ■	30	911-01827

All dimensions in mm. Subject to technical changes.  
Also available in thin wall on request.

Suitable for the following industries:

